1 Mains Filter

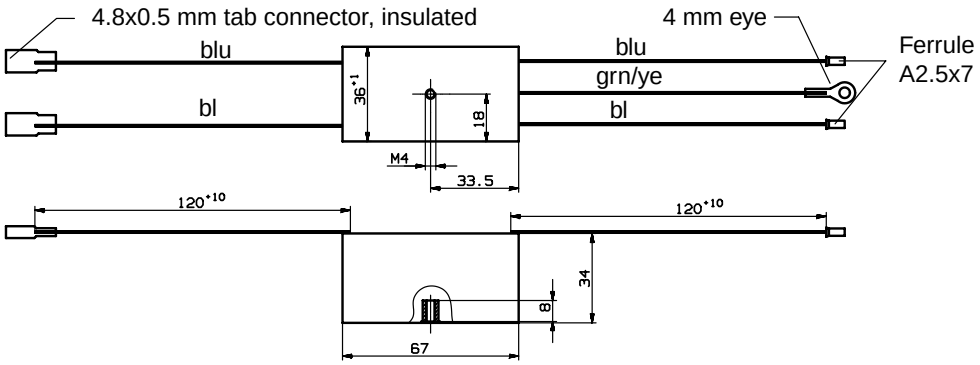

Technical data:

- Rated voltage 240 V (50/60 Hz)
- Nominal current 15 A (40 ˚C)
- Conductor area 1.5 mm^2 or AWG 14
- Leakage current < 0.25 mA, operating state
  < 0.5 mA, first-fault condition
  see EN 60601-1 Clause 19
- Electrical components, cables, printed board
  Encapsulated with UL- or CSA approval for and system voltage use

IEC heating appliance built-in connector
Supplier: Schurter
Order code: 6110.3300
Enclosed, loose

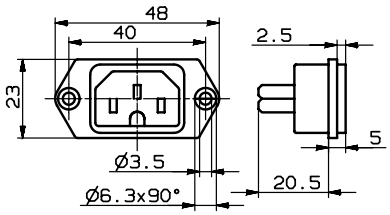

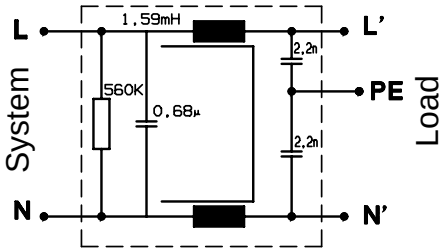



Fig. 1: Babytherm mains filter

GBS6132300T02.fm 15.09.99
For internal use only. Copyright reserved.

2 Mains Voltage Distributor

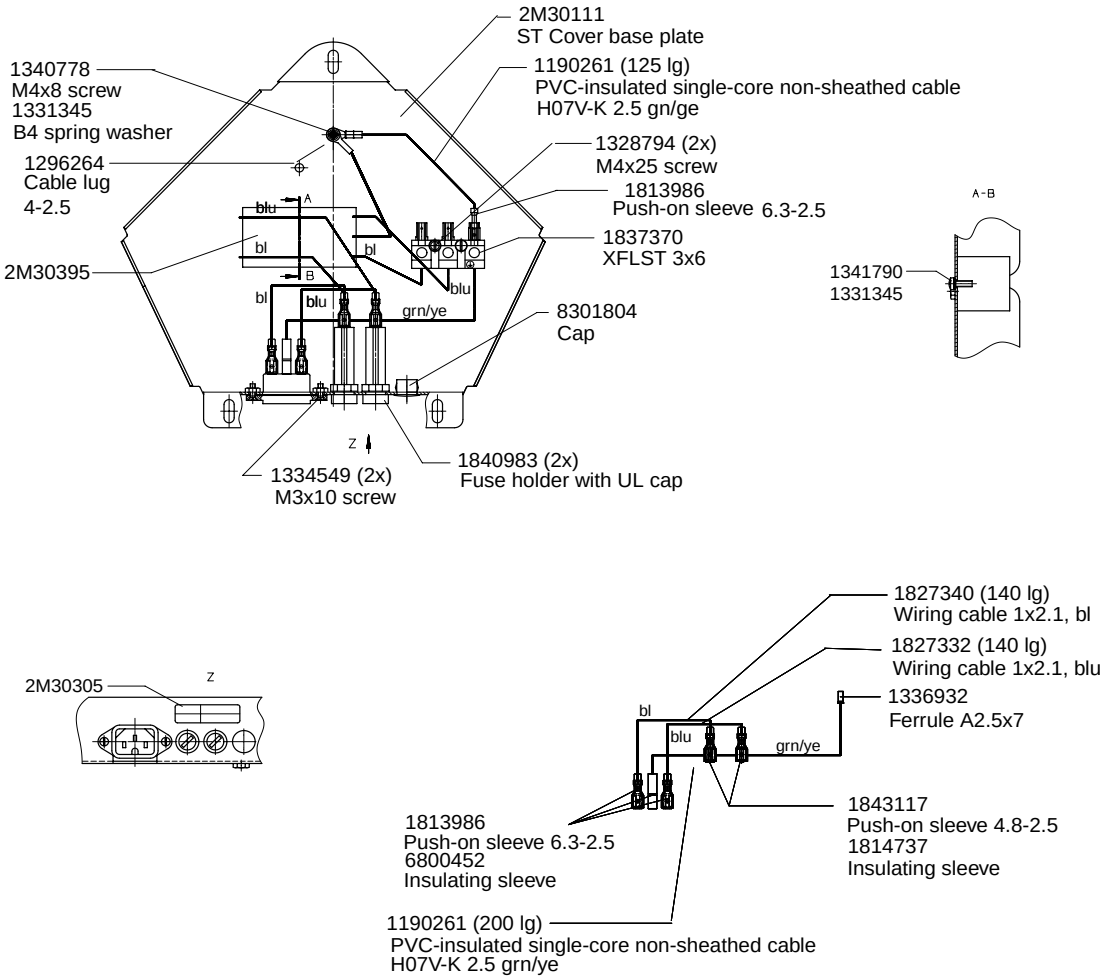

Fig. 2: Mains voltage distributor

GBS6132300T02.fm 15.09.99
For internal use only. Copyright reserved.

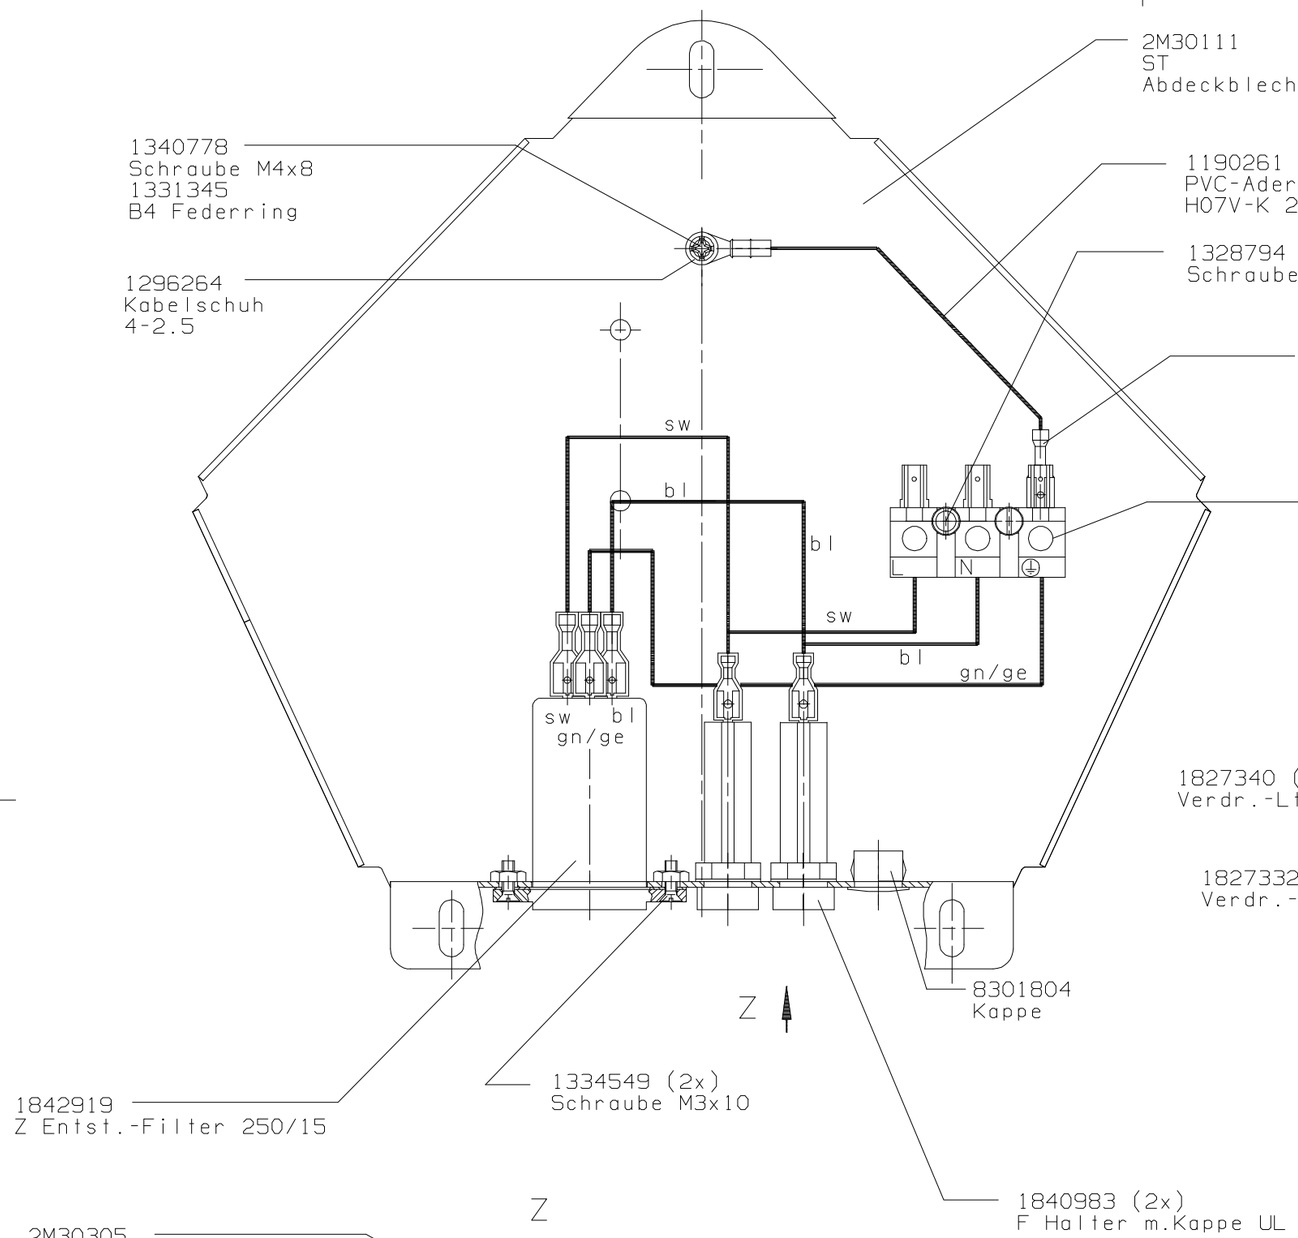

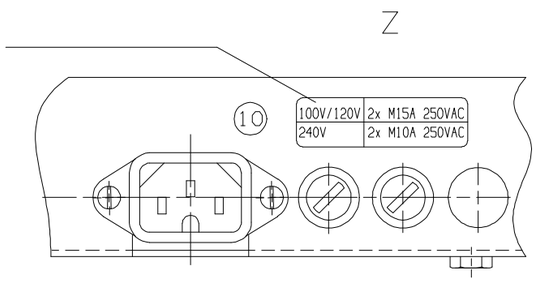

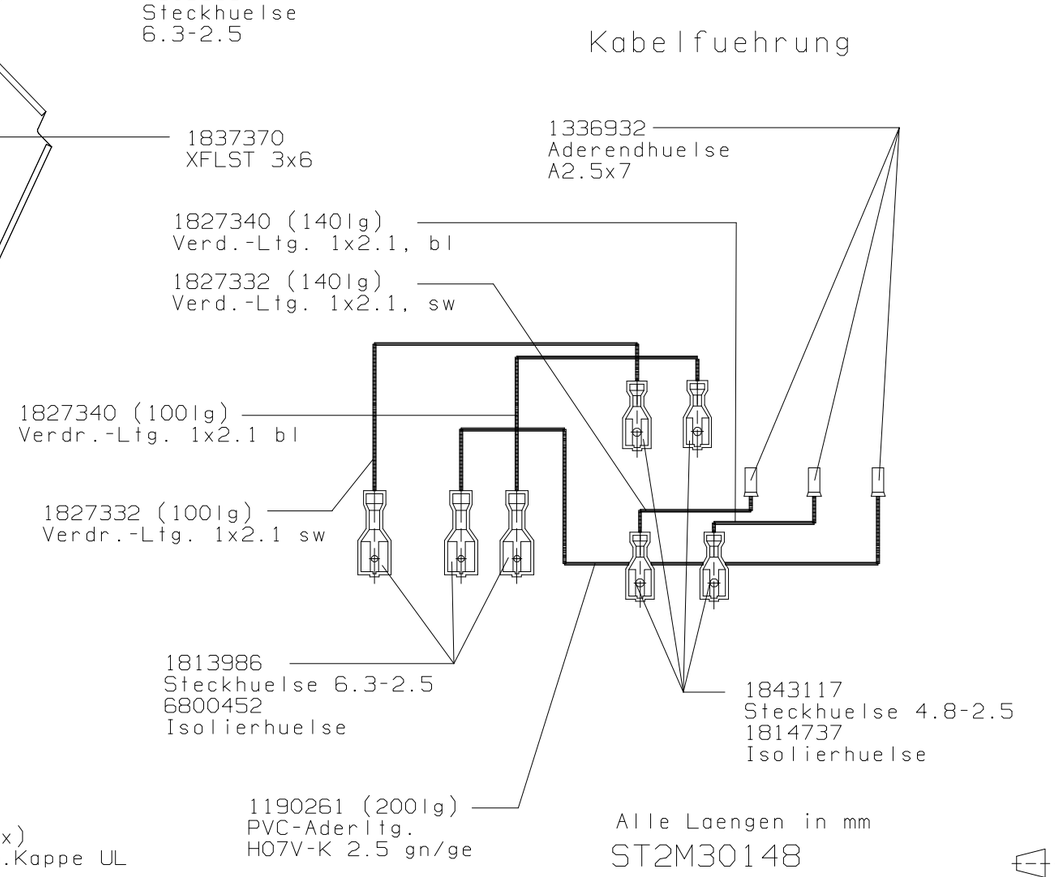

Alle Laengen in mm

ST2M30148

scale: ---	general tolerances: ---	material: ---	safety class: <s> 0, <m> 0
field reserved	revision text: Darstellung Schild geaendert (1998/QC/169)		
filing dept.: 2530	responsible dept.: 3401	author: Stickel; approved: Hartwig; date: 04.08.1998 / 04.08.1998	contract: n
type: drawing	language: de; replacement for: 2M30148-09	title: Netz Basisplatte; number: 2M30148	Dräger Medizintechnik GmbH, D-23542 Lübeck
creating system: CADRA	release status: PROD	revision index: 10	accures: 1x	page/of: 01/01

size A2

Schutz nach DIN 34 beansprucht.
Use of the document / contents is forbidden.
without express author(s) permission.
Dräger Medizintechnik GmbH, D-23542 Lübeck